



The Grindex team.

For more than 50 years, Grindex has specialised in designing and manufacturing electrical submersible pumps for professionals. Durable and dependable, they are used in the most demanding and specialised applications worldwide. We have delivered over 300,000 pumps in more than 100 countries.

We offer pumps for almost any application. Our range includes drainage pumps, sludge pumps, slurry pumps and stainless steel pumps.

When you're running a Grindex pump, you can be secure in the knowledge that you have a dedicated team behind you. Our experts are always on hand to help with anything you need. Through our global network of sales and service centres we provide the best level of support possible – day and night, seven days a week. It's all part of the service.

For more information, please visit www.grindex.com

Grindex AB • Box 538 • SE-136 25 Haninge • Sweden • Tel +468 606 66 00 • Fax +468 745 53 28 • marketing@grindex.com

9005351 ENG 60 Hz (3000) printed 2007.10



Submersible compact, lightweight pumps for construction, tunneling, mining and clean-up jobs.



Drainage pumps:

- Micro
- Maro

Sludge pumps:

- Solid

60 Hz


Micro, Macro and Solid. Think small. Win big.

You need a tough, portable submersible pump. One that can be depended on in an emergency situation. Or handle an ongoing dewatering job. A pump that can handle the very worst of conditions, from removing sludge from construction sites and tunneling projects to dewatering mines.


Micro, Macro and Solid from Grindex can do all this and more. These compact pumps are extremely lightweight relative to their capacity. Engineered with stainless steel, composite materials and polyurethane for strength and impact resistance, they're untroubled even by sand, gravel and sludge particles.

The design of these pumps makes servicing quick and easy. And service kits with easy-to-follow assembly instructions simplify things even further.


MICRO

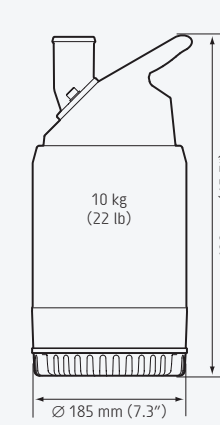

MACRO

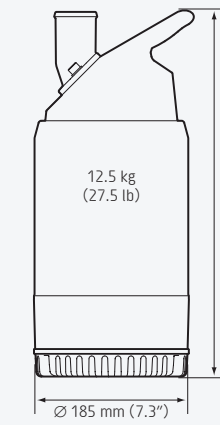

SOLID

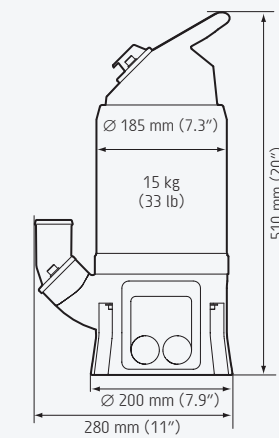


Drainage pumps

Micro and Macro excel in applications where speed and easy handling are essential. They are built to handle contaminated water, pH 3-9, and water containing relatively abrasive solids up to the size of 5mm.

When the job is beyond the capabilities of a drainage pump, Solid takes over. It's built to handle contaminated water, pH 3-9, and water containing sand and gravel with particle sizes up to 38 mm.

This is what makes Micro, Macro and Solid unique:

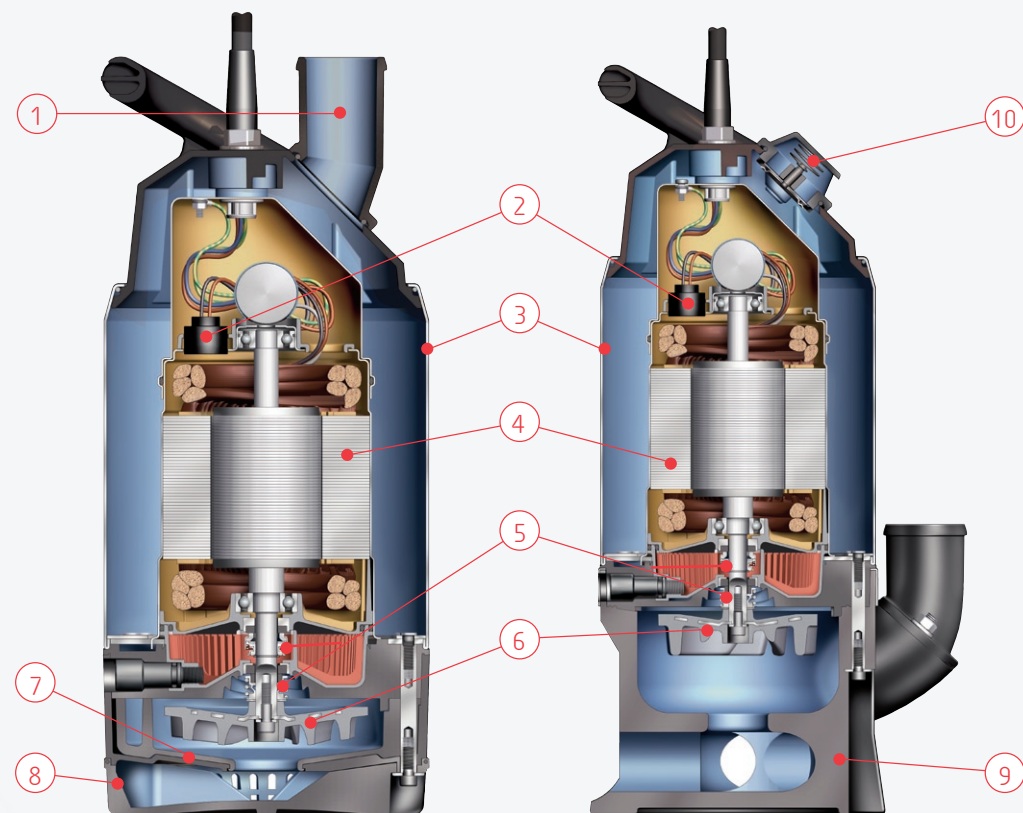

Drainage pump

1. Discharge connection, vertical/horizontal
2. Overheating protection
3. Outer casing of stainless steel
4. Squirrel cage induction motor
5. Double mechanical shaft seals

Sludge pump

6. Polyurethane impeller
7. Polyurethane diffusers
8. Shockproof rubber strainer
9. Shockproof polyurethane pump housing
10. Air valve

Technical data

Pump type

One-phase

Classification

Electrical submersible pump
Protection class: IP68, 5 m (16.5 ft)

Power cable

H07RF-F, 3X1 mm² or SOW 16AW6/3

Discharge connections

2", hose, BSP or NPSM thread

Materials


Pump top: *Stainless steel/reinforced polymer*
Diffusers (drainage): *Polyurethane wear parts*
Pump housing (sludge): *Polyurethane wear parts*
Outer casing: *Stainless steel*
Stator housing: *Stainless steel*
Motor shaft: *Stainless steel*
Shaft seals upper: *Carbon/aluminium oxide*
Shaft seals lower: *Silicon carbide/Silicon carbide*
Impeller: *Polyurethane*
Screws and nuts: *Stainless steel*

Limitations

Max submersion depth: 5 m (16.5 ft)
Max liquid temperature: 35°C (95°F)
Max liquid density: 1100 kg/m³
pH of the liquid: 3-9

Accessories

Float switch
Low suction collar (drainage)

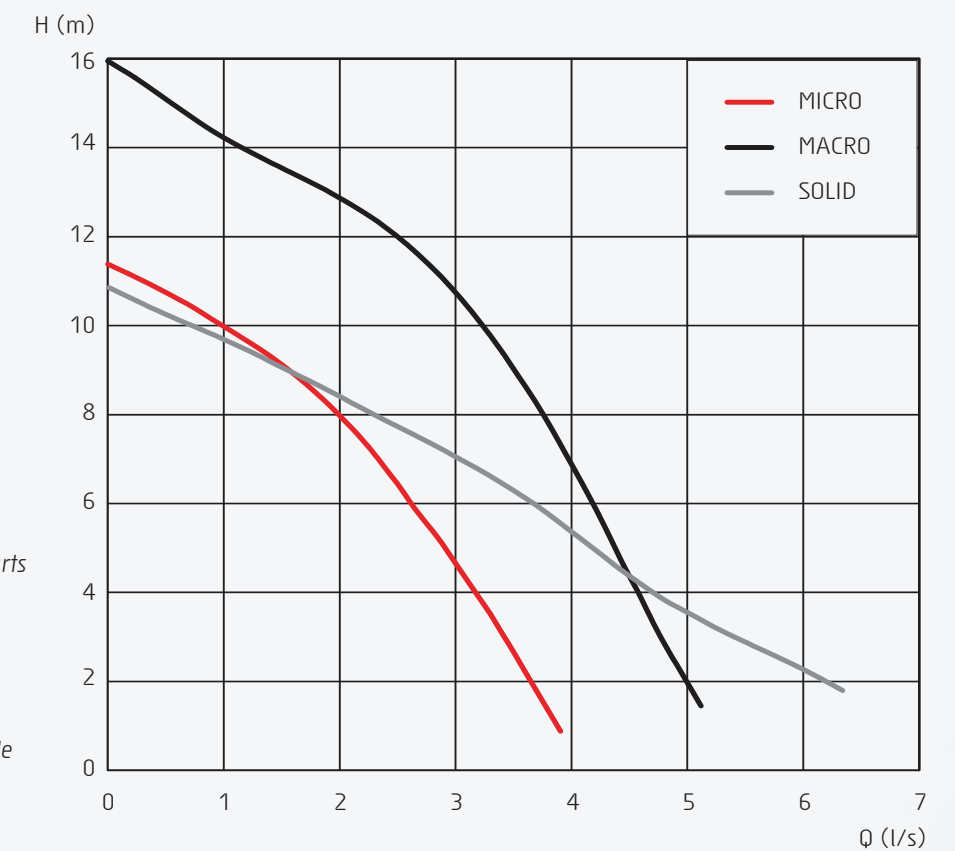

115 V, 230 V / 60Hz	MICRO	MACRO	SOLID
Rate output	0.45 kW	0.82kW	0.82 kW
Max power consumption	0.65 kW	1.1 kW	1.1 kW
Rated current at 230 V	2.9 A	4.8 A	4.8 A
Shaft speed	3300 RPM	3400 RPM	3400 RPM
Strainer holes / throughlet	5x11 mm	5x11mm	Ø 38 mm
Weight	10 kg	12.5 kg	15 kg
Dimensions Ø/H	Ø 185/400 mm	Ø 185/430 mm	Ø 200/510 mm